A STANDARD INSTALLATION
CLOSER MOUNTED ON PULL SIDE OF DOOR

Max. Door Opening 180°.

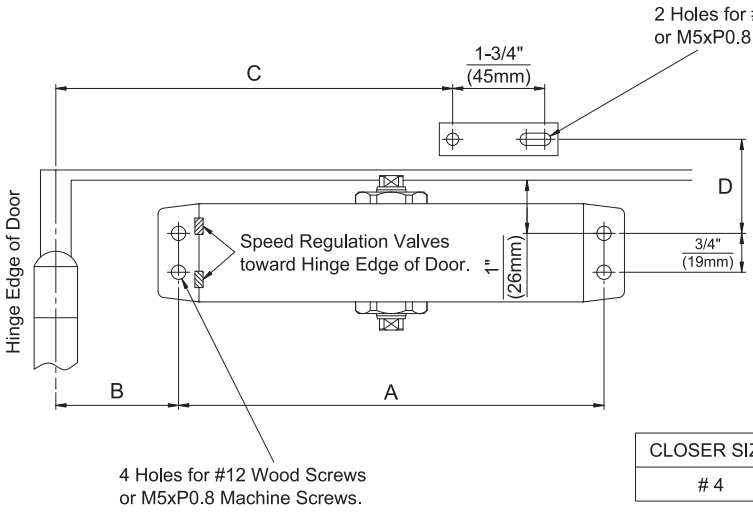

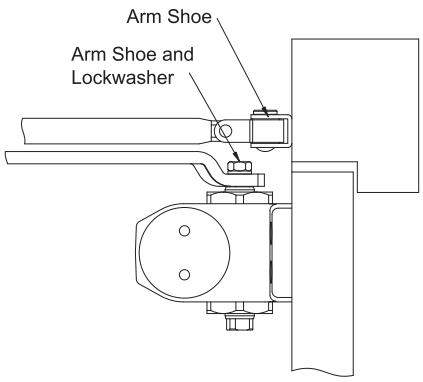

CLOSER SIZE	A	B	C	D
# 4	9-1/16"(230mm)	2-9/16"(65mm)	8-1/4"(210mm)	2"(51mm)

B TOP JAMB INSTALLATION
CLOSER MOUNTED TOP JAMB ON PUSH SIDE OF DOOR

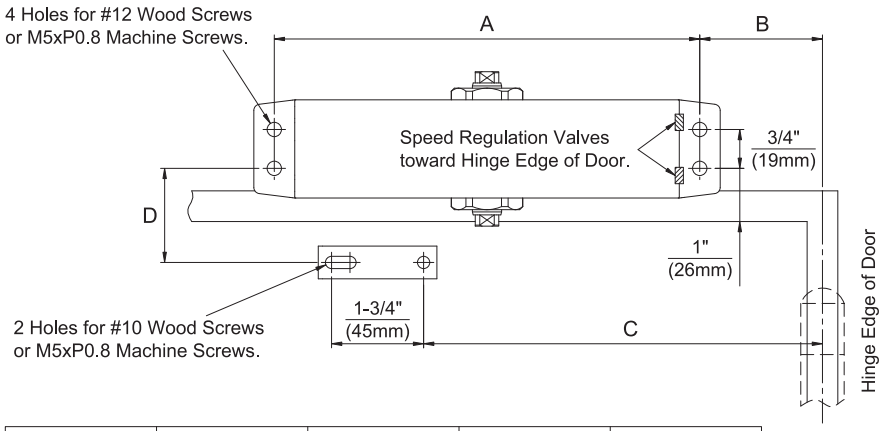

Max. Door Opening 180°.

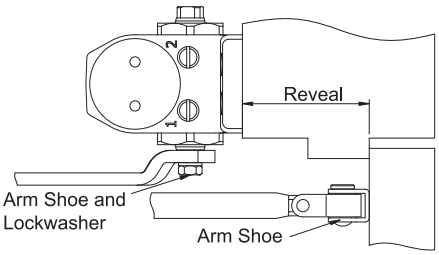

A longer connecting rod is required for reveals greater than 1-5/8"(41mm)

CLOSER SIZE	A	B	C	D
# 4	9-1/16"(230mm)	2-9/16"(65mm)	8-1/4"(210mm)	2"(51mm)

C PARALELL ARM INSTALLATION
CLOSER MOUNTED ON PUSH SIDE OF DOOR

Max. Door Opening 180°.

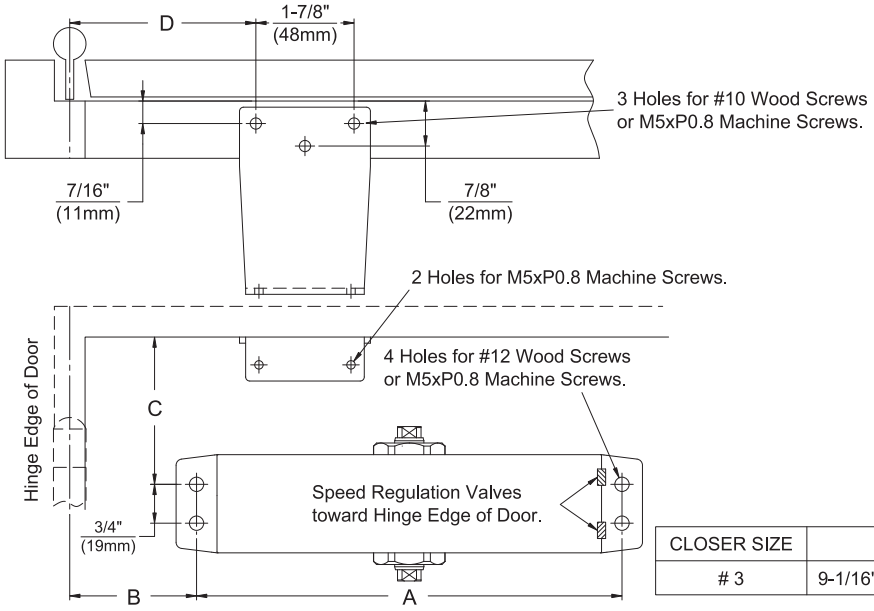

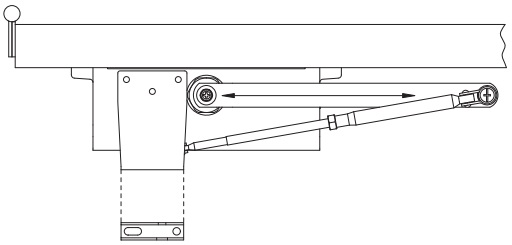

CLOSER SIZE	A	B	C	D
# 3	9-1/16"(230mm)	2-9/16"(65mm)	2-13/16"(72mm)	4-3/16"(106mm)

A STANDARD INSTALLATION

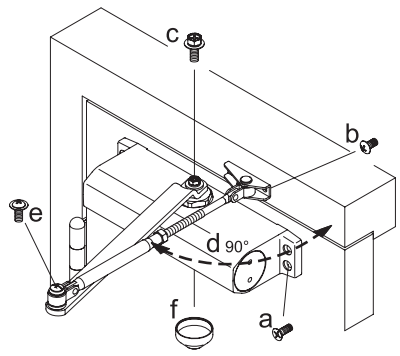

a → b → c → d → e → f

B TOP JAMB INSTALLATION

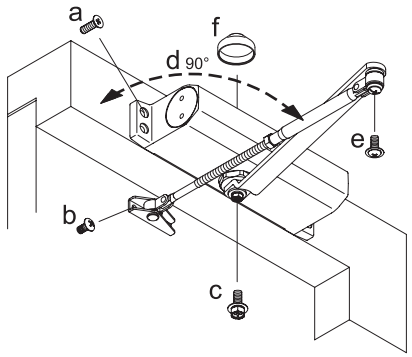

a → b → c → d → e → f

C PARALELL INSTALLATION

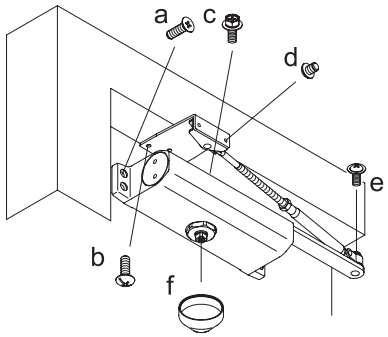

a → b → c → d → e → f

Sweep

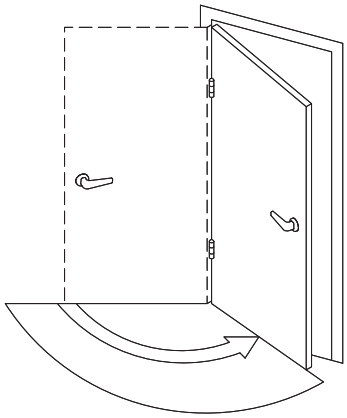

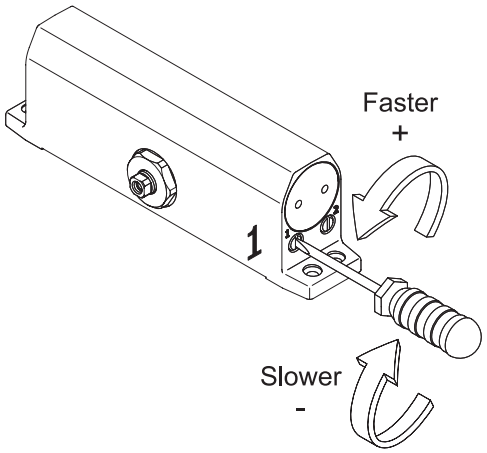

Latch

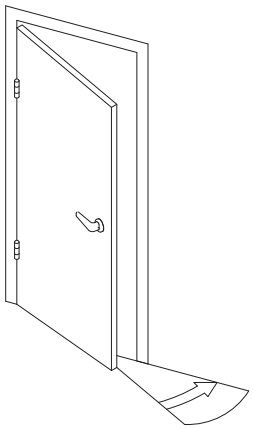

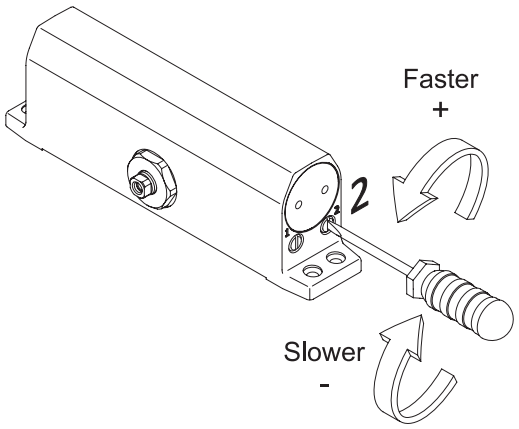

Backcheck

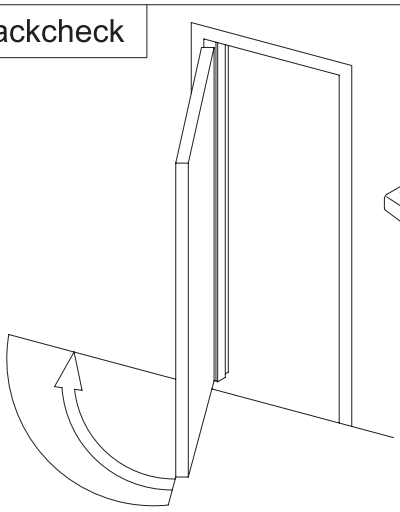

Caution :
1. Don't completely close the valve.

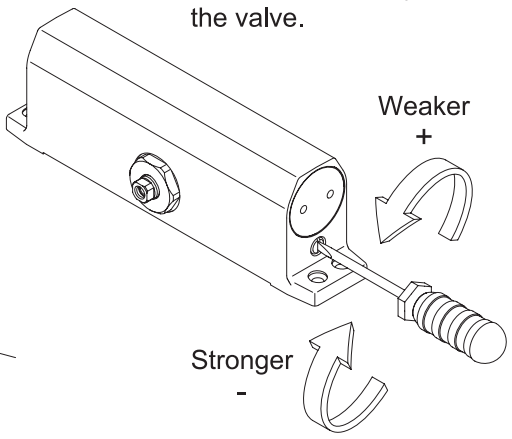

Standard Components

- Closer Body



- Arm Assembly

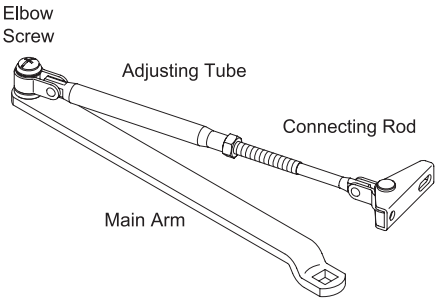

- Soffit Plate



Soffit Plate Used with Parallel Arm Closers Only

- Pinion Cap